


Cleanshield Roll Goods

→ SPECIALTY MAT • INDOOR

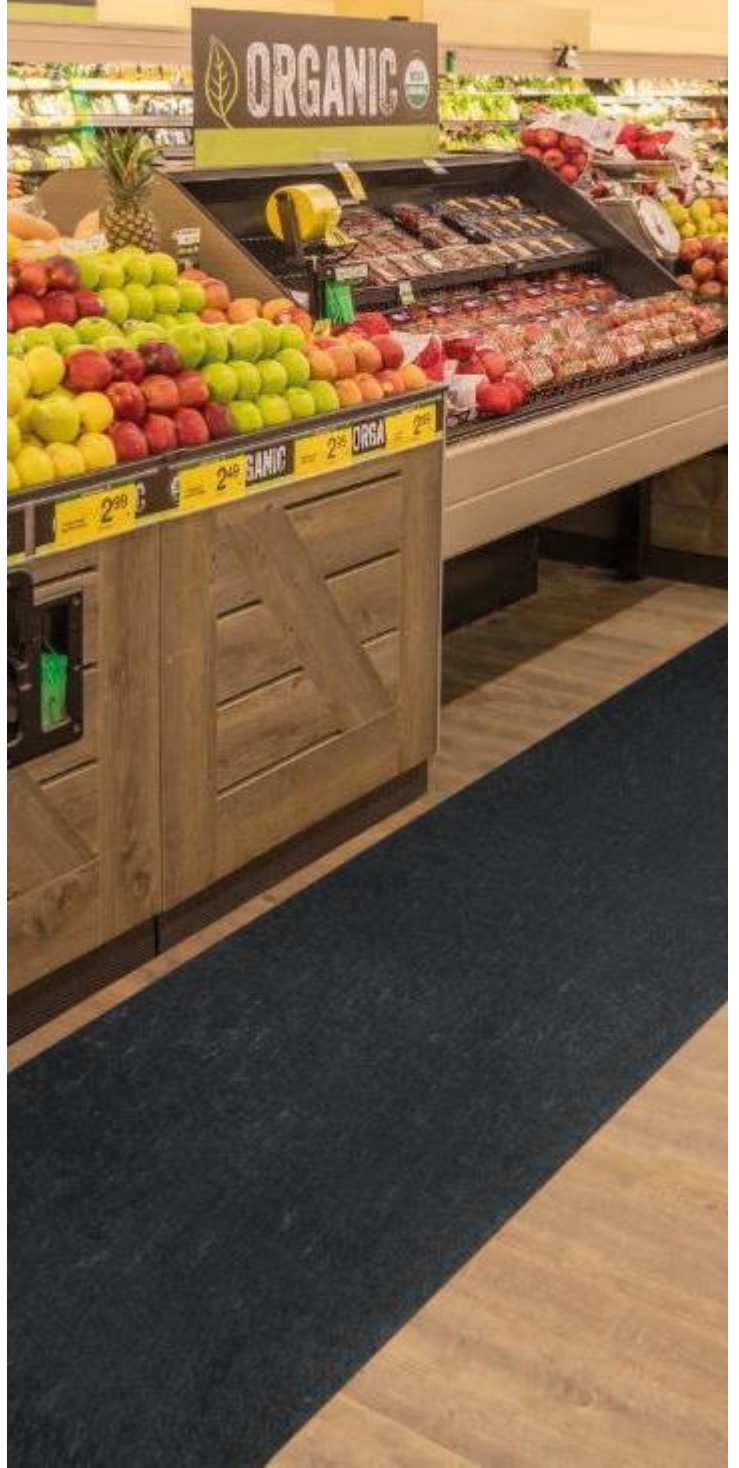





→ WHY CHOOSE THIS MAT?

Cleanshield Roll Goods is a low-profile, anti-microbial matting solution with adhesive backing to ensure it stays in place. It is recommended for commercial use on hard floor surfaces to help prevent slips, trips, and falls caused by moisture.

- **Anchor Safe adhesive backing system** keeps the mat flat and in place even with extreme traffic
- **Very low profile** reduces tripping hazard
- **Highly absorbant**, keeps floors clean and safe
- **Quick and easy to install**
- **Performs up to 3 months** under normal use

→ SPECIFICATIONS

Material	Non-Woven PET (Polyester)
Backing	Anchor Safe adhesive backing system with moisture barrier
Other properties	<ul style="list-style-type: none">• Thickness: 1.9 mm• Weight: 540 g/m²
Safety	Flammability: Passes Flammability Standard DOC-FF-1-70.
Colour	Black
Size	91 cm x 30.48 m
Recommended use	Recommended for use in areas where additional traction or slip resistance is needed. Especially popular in restrooms, grocery stores, convenience stores, healthcare facilities, and retail establishments.



→ CLEANING INSTRUCTIONS

- Do not pick up your Cleanshield Roll Goods mat to clean the floor underneath until you are ready to replace the mat.
- The mats can be left in place during regular cleaning. Floor scrubbers, vacuums, brooms, and mops will pass right over without damaging the surface of the mat.
- Please use low settings for water and pressure.
- Tougher stains may be pre-treated with standard carpet cleaning products and agitated with a brush to loosen the soil.
- The mats are designed to dry quickly, however, standard fans or floor blowers can be used to speed the drying time.
- For extremely wet conditions, use a wet vac or extractor to remove water.
- Cleanshield Roll Goods mats are designed to last up to 4 months under normal use. Mats should be replaced if they show signs of wear, damage, or a weakened bond to the floor, and they should always be changed out within 4 months regardless of wear.