Hog Heaven Linkable Yellow


ANTI-FATIGUE • INDOOR& OUTDOOR









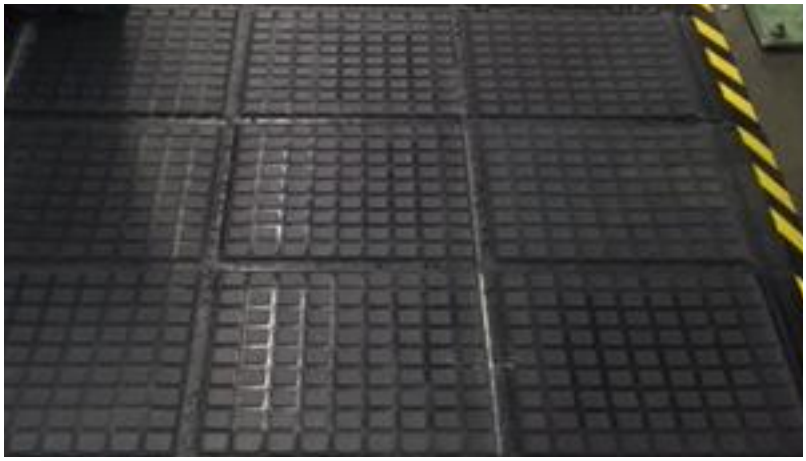




WHY CHOOSE THIS MAT?

Hog Heaven Linkable Yellow Mats provide a customizable matting solution for large areas (long runs). They offer outstanding anti-fatigue qualities and perform in various environments including those with oil, grease, and chemicals.

- **Comfortable** - High-density, closed-cell nitrile-blended cushion provides excellent anti-fatigue qualities to help reduce the pain and fatigue associated with standing for long periods of time
- **Clean** - Anti-microbial treatment provides lifetime protection from odors and degradation
- **Safe** - Beveled edges provide a safe transition from the floor to the mat and allows carts to easily roll over the surface. Textured surface offers superior slip and skid resistance
- **Versatile** - Grease and oil proof; welding safe; ESD rating of electrically conductive
- **Easy to clean -** Lightweight flexible design ensures easy handling and cleaning – 100% commercially launderable
- **Durable** - Nitrile-blended cushion provides years of useful service life - cushion is molded, not glued, to the nitrile rubber surface so it will not separate - edges will not crack or curl

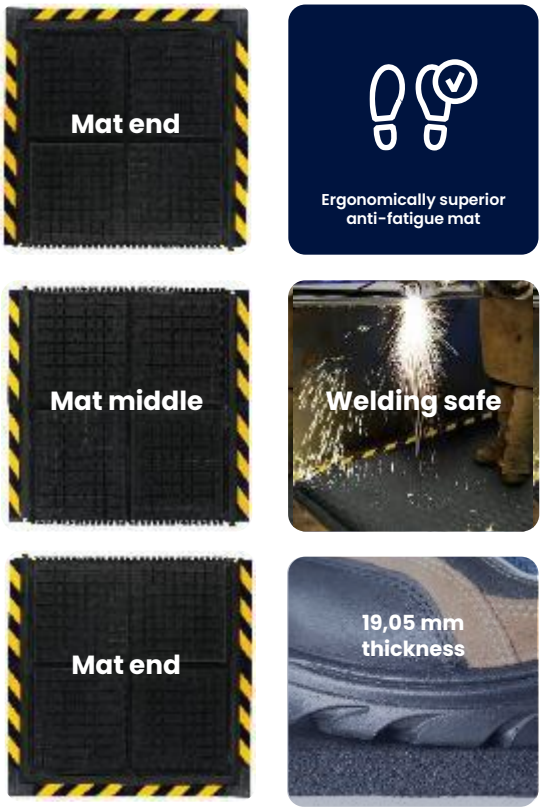

SPECIFICATIONS

Material	• **Surface:** 100% Nitrile Rubber with 4% recycled regrind in the rubber • **Cushion**: Closed-cell nitrile/PVC-blended foam • **Cushion Thickness:** 7.0 - 9.0 lbs/ft3
Other properties	• **Borders:** Yellow Striped or Black • **Thickness:** 19,05 mm • **Durometer:** 40 to 45 • **Tensil:** 1100 PSI (Provides superior anti-fatigue properties for worker comfort and ergonomic benefits) • **Compression Deflection:** 42.3% at 20 psi, 56.8% at 40 psi
Safety	• **Flammability:** Passes Flammability Standard DOC-FF-1-70 & DOC-BS-479 • **Static control:** ASTM C 1028-96 static coefficient of friction: Dry 0.74, Wet 0.77 • **Certified Slip Resistant** by the National Floor Safety Institute • **Welding Safe**
Colour	Black
Recommended use	Recommended for indoor use in industrial settings such as manufacturing facilities, distribution centers, machine shops, and areas where grease, oil, or chemicals may be present

STANDARD SIZES

Mat end: 101,28 x 111,12 cm
Mat middle: 91,44 x 111,12 cm

CLEANING INSTRUCTIONS

- NOT LAUNDERABLE in commercial washers
- Scrub with a deck brush (as needed) using a detergent with a neutral pH
- Rinse with a hose or pressure washer
- Hang to dry
- Mats and tiles should always be dry before they are placed back in service
- The mat should be laid flat during storage to prevent curling of the edges